


High-voltage Battery System



T-BAT H 5.8
(Master)

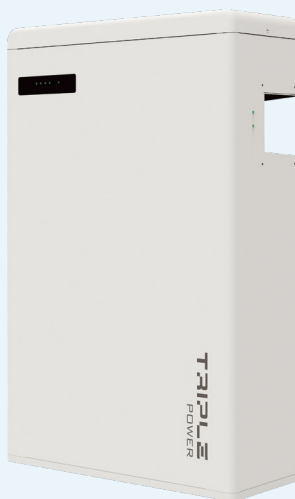

T-BAT H 5.8 V2
(Master)



HV11550 / HV11550 V2
(Slave)



High Performance

- 90% depth of discharge (DOD)
- Cycle life>6000 cycles



Assured Reliability

- LFP battery cell & high-performance processors
- IP65 protection rating
- No toxic heavy metals or caustic materials



Smart Management

- Remote fault diagnosis, upgrade and maintenance



Flexible Adaptability

- Floor or wall mounting optional

T-BAT H 5.8
T-BAT H 5.8 V2
T-BAT H 11.5
T-BAT H 11.5 V2
T-BAT H 17.3
T-BAT H 17.3 V2
T-BAT H 23
T-BAT H 23 V2
NOMINAL CHARACTER

Nominal voltage	115.2 V	230.4 V	345.6 V	460.8 V
Operating voltage	100 ~ 131 V	200 ~ 262 V	300 ~ 393 V	400 ~ 524 V
Battery type	LFP			
Total capacity	5.8 kWh	11.5 kWh	17.3 kWh	23.0 kWh
Usable capacity ^①	5.1 kWh	10.4 kWh	15.5 kWh	20.7 kWh
Battery roundtrip efficiency	95%			
Rated power	2.8 kW	5.7 kW	8.6 kW	11.5 kW
Max power	4.0 kW	8.0 kW	12.0 kW	16.1 kW
Recommend charge / discharge current	25 A			
Max charge / discharge current	35 A			
Short circuit current	760 A			
Cycle life	> 6000 cycles			
Warranty	10 years			

ENVIRONMENT REQUIREMENT

Operating temperature	Charge: 0 ~ 55°C / Discharge: -10 ~ 55°C
Storage temperature	-20 ~ 30°C (12 months) , 30 ~ 55°C (6 months)
Relative humidity	4 ~ 100% RH (condensing)
Altitude	< 2000 m
Ingress protection	IP65

COMMUNICATION

System to inverter	CAN2.0
Battery to battery / BMS	RS485
Data collection port / FW update	CAN2.0
Master control working mode indicator	1 LED
Master control capacity indicator	4 LED (25%, 50%, 75%, 100%)
Battery module LED	2 LED
Reset	Button
Switch ON / OFF	Button × 1 + breaker × 1

STANDARD

Safety (V1)	CE, IEC 62619, UKCA, VDE2510, JIS-C 8715, UL1973, FCC, REACH
Safety (V2)	CE, IEC 62040, IEC 62619, UKCA, VDE2510, RoHS, REACH
UN number	UN3480
Hazardous materials classification	Class 9
Transport testing requirement	UN38.3

GENERAL

Dimensions (L × W × H)	474 × 193 × 708 mm	474 × 193 × 708 mm + 474 × 193 × 647 mm	474 × 193 × 708 mm + (474 × 193 × 647 mm) × 2	474 × 193 × 708 mm + (474 × 193 × 647 mm) × 3
Weight	72.2 kg	72.2 kg + 68.5 kg	72.2 kg + 68.5 kg × 2	72.2 kg + 68.5 kg × 3

① Test conditions: 90% DOD, 0.2C charge & discharge @+25°C

- * X3 Hybrid inverter can connect 2-4pcs of T58 batteries (1pc of T58 master, and rest 1-3pcs of T58 slave)
- * X1 Hybrid inverter can connect 1-3pcs of T58 batteries (1pc of T58 master, without T58 slave, or with 1-2pcs of T58 slave)
- * With BMS Parallel Box-II, the maximum battery quantity connected on each inverter varies, please kindly check datasheet of BMS Parallel Box-II
- * Maximum charge/discharge current may be variant with different inverter models.
- * Maximum charge/discharge current may be variant at different temperature and SOC
- * HV11550 V1 and HV11550 V2 share the same appearance